

CERTIFICATE

on the evaluation of recyclability within the paper industry

Moorim SP Co., Ltd
656, Gangnam-daero, Gangnam-gu
06027 Seoul
SÜDKOREA

On the basis of the laboratory analysis and in accordance with the criteria of the PTS method
PTS-RH 021:2012 (Draft Oct 2019) the sample described below

| | |
|---|--|
| Product name | Neoforet Aircushion |
| Product description | The semi-finished packaging product sample Neoforet Aircushion is an unprinted paper made of unbleached chemical pulp. The paper (75g/m ²) has an one-side barrier coating (15g/m ²). The coating material is EAA (Ethylene Acrylic Acid). |
| Product category acc. to PTS-RH 021:2012 | II – Packaging products as well as paper and board (for the manufacture of packaging products) |
| Recyclable percentage¹ | 73.6 % |


is classified as

‘recyclable, but worthy of product design improvement.’

Within standard stock preparation of the packaging paper industry.

This certificate loses its validity in case of qualitative or quantitative changes of the components of the tested sample and is only applicable in connection with the test report No. AB.0002704 dated 08th February 2021.


Heidenau, 03th March 2021

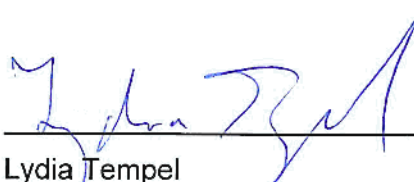

Lydia Tempel
Head of Department
Recycling & Digitalisation



PTS
FIBRE based solutions
Papiertechnische Stiftung
Pirnaer Straße 37 • 01809 Heidenau
www.ptspaper.de

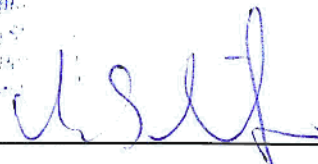

Mike Schiefer
Method supervisor

¹ Recyclable percentage (Fibre yield) means the percentage suitable for recycling or usable in papermaking. It corresponds to total mass of the sample (50g oven-dry \pm 100%) less total reject